

AlGaAs laser diodes

RLD-78MC

The RLD-78MC is the world's first mass-produced laser diodes that is manufactured by molecular beam epitaxy. The characteristics of this laser diode are suitable for use in sensors and bar code readers.


●Applications

Sensors
Bar code readers
Measuring instruments

●Features

- 1) One-third the dispersion compared with conventional laser diodes.
- 2) High-precision, compact package.

●External dimensions (Units: mm)

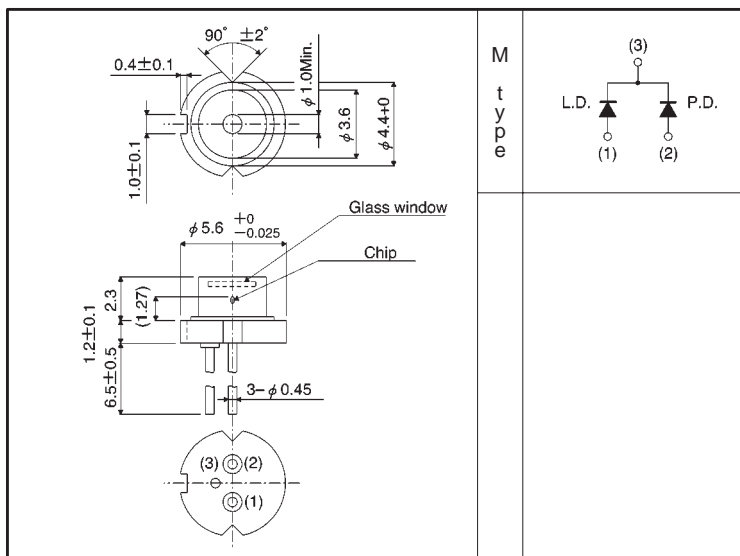

Note: The lengths of the RLD-78MC leads are 5.0 ± 0.5 mm.

●Absolute maximum ratings ($T_c = 25^\circ\text{C}$)

Parameter		Symbol	Limits	Unit
Output		P_o	5	mW
Reverse voltage	Laser	V_R	2	V
	PIN photodiode	V_R (PIN)	30	V
Operating temperature		T_{opr}	$-10 \sim +60$	$^\circ\text{C}$
Storage temperature		T_{stg}	$-40 \sim +85$	$^\circ\text{C}$

●Electrical and optical characteristics (Tc = 25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Threshold current	I_{th}	—	35	60	mA	—
Operating current	I_{op}	—	45	70	mA	Po=3mW
Operating voltage	V_{op}	—	1.9	2.3	V	Po=3mW
Differential efficiency	η	0.1	0.25	0.6	mW/mA	$\frac{2mW}{I(3mW)-I(1mW)}$
Monitor current	I_m	0.1	0.2	0.6	mA	Po=3mW, $V_{R(PIN)}=15V$
Parallel divergence angle	$\theta_{//}^*$	8	11	15	deg	Po=3mW
Perpendicular divergence angle	θ_{\perp}^*	20	37	45	deg	
Parallel deviation angle	$\Delta\phi_{//}$	—	—	± 2	deg	
Perpendicular deviation angle	$\Delta\phi_{\perp}$	—	—	± 3	deg	
Emission point accuracy	ΔX ΔY ΔZ	—	—	± 80	μm	—
Peak emission wavelength	λ	770	785	810	nm	Po=3mW

* $\theta_{//}$ and θ_{\perp} are defined as the angle within which the intensity is 50% of the peak value.

●Electrical and optical characteristic curves

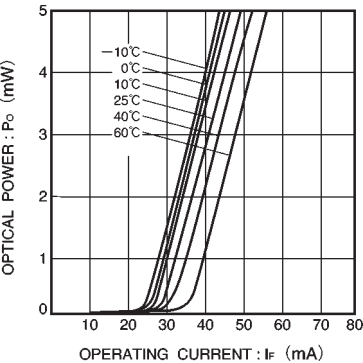


Fig. 1 Optical output vs. operating current

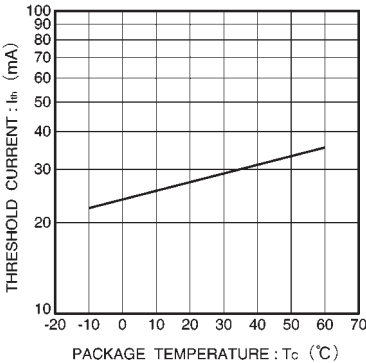


Fig. 2 Dependence of threshold current on temperature

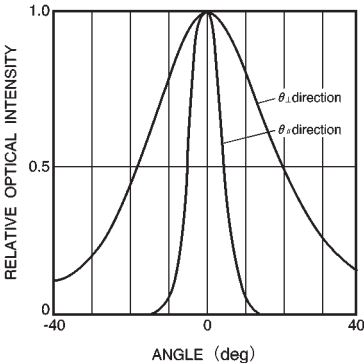


Fig. 3 Far field pattern

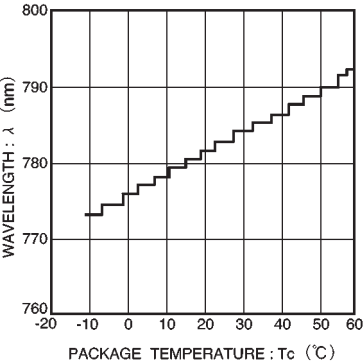


Fig. 4 Dependence of wavelength on temperature

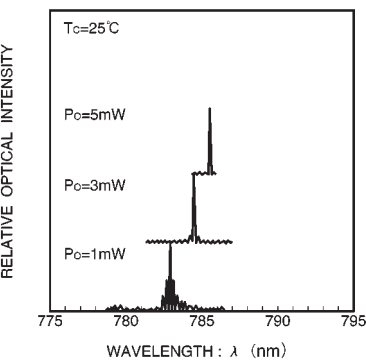


Fig. 5 Dependence of emission spectrum on optical output

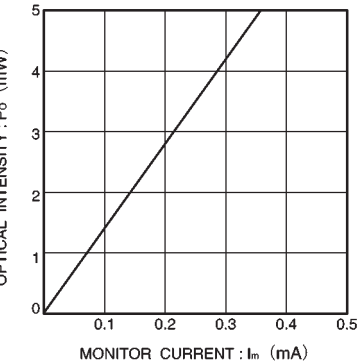


Fig. 6 Monitor current vs. optical output

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.